

SYNOtag™ | Passive

SM-8861 Plastic RFID Bracelets



125 KHz and 13.56 MHz Passive RFID bracelets made of PVC + ABS with operating temperature range of -40 C ~ 70 C. Suited for long lasting use in close proximity (Up to 60 mm) RFID applications such as in office, building, warehouse and production line RFID access control.


Part Numbers

- ▶ Black: SM-8861BK
- ▶ Blue: SM-8861BU
- ▶ Green: SM-8861GE
- ▶ Yellow: SM-8861Y
- ▶ Purple: SM-8861P
- ▶ Silver: SM-8861S
- ▶ Red: SM-8861R
- ▶ Orange: SM-8861O

Available IC's

- ▶ GK4001 (125 KHz, 64bit, R/O)
- ▶ H4102 (125 KHz, 64 bit, R/O)
- ▶ Temic e5557 (125 KHz, 256 bit, R/W)
- ▶ I-Code (13.56 MHz, 512 bit, R/W, ISO 15693 & ISO/IEC 15693)
- ▶ Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)

Dimensions

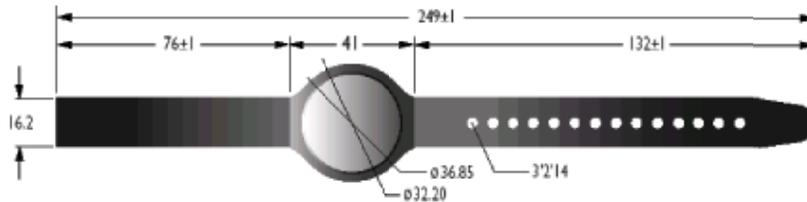

Product Warranty: SYNOMETRIX offers a standard 1 year repair or replace warranty from date of shipping on all products found to have a defect that results from manufacturing.

SM-8861 Re-usable RFID Bracelet

Visit us at www.synometrix.com or email us at info@synometrix.com

SYNOtag™ | RFID

For further information please contact:
John Hannon, Managing Director
SYNOMETRIX | Asia Pacific Taipei, Taiwan
IDD: +886 2 2758 1279